




Your Multi-Purpose Exhaust Vent Solution.

EXHAUST INSTALLATION APPLICATIONS:

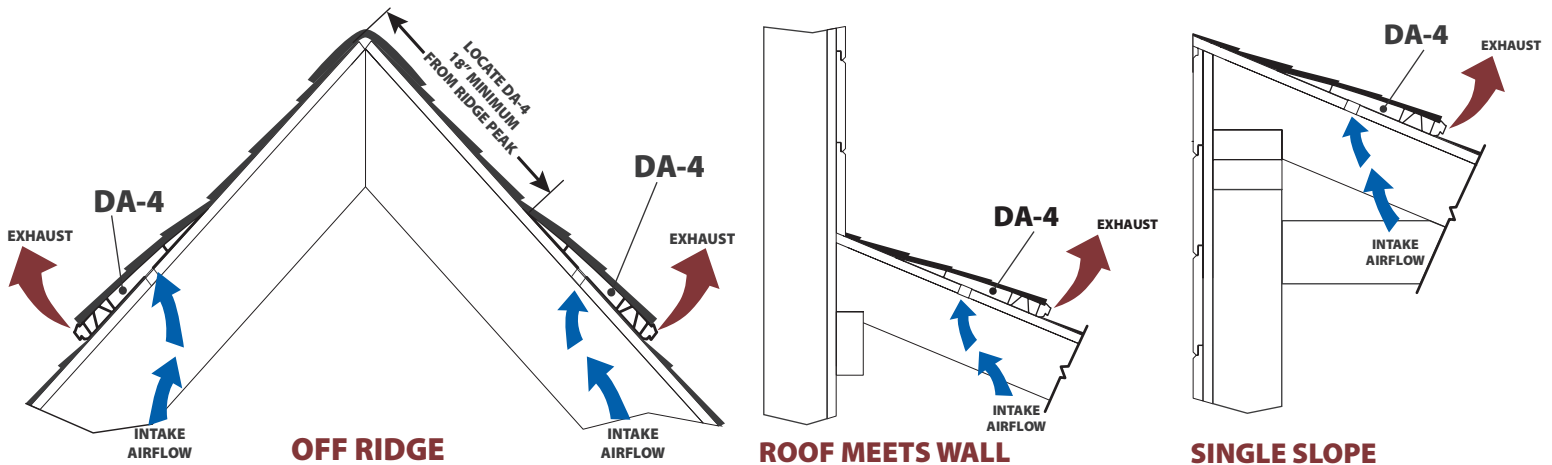


DA-4 FEATURES:

- ▶ 2½" ring shank nails included.
- ▶ Made from the same durable, long lasting and field tested material as the Lomanco Omni Series vents.
- ▶ Fits roof pitches 3/12 to 16/12.
- ▶ Unique design provides enhanced weather protection.
- ▶ Integrated end plug every 2 inches.
- ▶ 9 square inches of Net Free Area per linear foot.
- ▶ Molded nail lines.
- ▶ Slot width guidelines.
- ▶ Patented design.
- ▶ The DA-4 can be used as an intake vent (see reverse).
- ▶ **Lifetime Limited Warranty.**

Model	Length (ft.)	NFA (in. ²)	Roof Pitch	Packaged
DA-4	4'	36	3/12 to 16/12	10 Per Box

Molded-in Cut Lines for Tapered Transitions.

Engineered Material Guarantees Longevity.

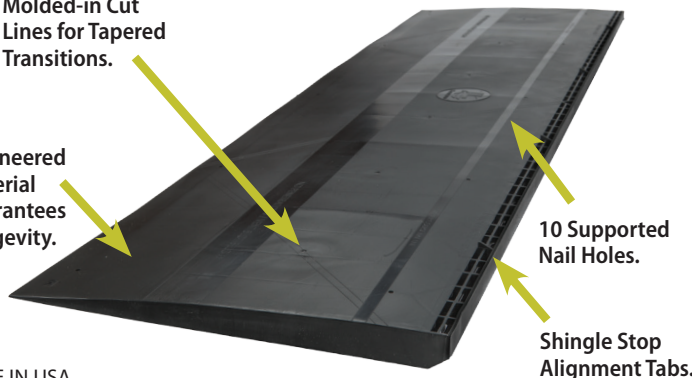

Lomanco recommends balancing the intake ventilation system to the chosen exhaust ventilation system, a balanced system consists of 50% intake ventilation and 50% exhaust ventilation.

Lomanco ventilation calculations are based on the IRC/FHA standard of one square foot of ventilation for every 300 square feet of attic floor space. For ventilation calculators and additional information, visit our website, lomanco.com.

MADE IN USA


LO459_1214



Fully Supported
Tapered Transition.

Off Roof Edge Installation

Roof Deck Installed Intake Ventilation Made for Roofers.

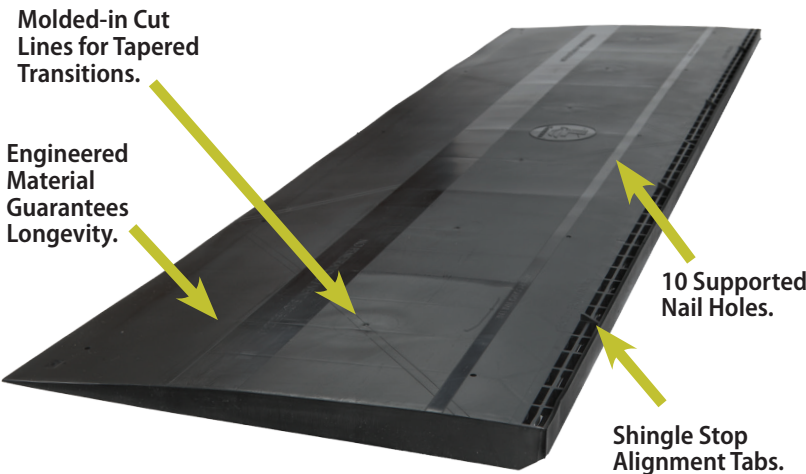


Roof Edge Installation

DA-4 FEATURES:

- ▶ 2½" ring shank nails included.
- ▶ Made from the same durable, long lasting and field tested material as the Lomanco Omni Series vents.
- ▶ Fits roof pitches 3/12 to 16/12.
- ▶ Unique design provides enhanced weather protection.
- ▶ Integrated end plug every 2 inches.
- ▶ 9 square inches of Net Free Area per linear foot.
- ▶ Molded nail lines.
- ▶ Intake slot width guidelines.
- ▶ Patented design.
- ▶ The DA-4 can be used as an exhaust vent (see reverse).
- ▶ **Lifetime Limited Warranty.**

Model	Length (ft.)	NFA (in. ²)	Roof Pitch	Packaged
DA-4	4'	36	3/12 to 16/12	10 Per Box



Want more info?
Scan this QR
code with your
smartphone.

Lomanco recommends balancing the intake ventilation system to the chosen exhaust ventilation system, a balanced system consists of 50% intake ventilation and 50% exhaust ventilation.

Lomanco ventilation calculations are based on the IRC/FHA standard of one square foot of ventilation for every 300 square feet of attic floor space. For ventilation calculators and additional information, visit our website, lomanco.com.